



BRAVO DP - BRAVO DP CASE BRAVO DP AQUASTOP

UNDER-SINK FILTER HOUSINGS

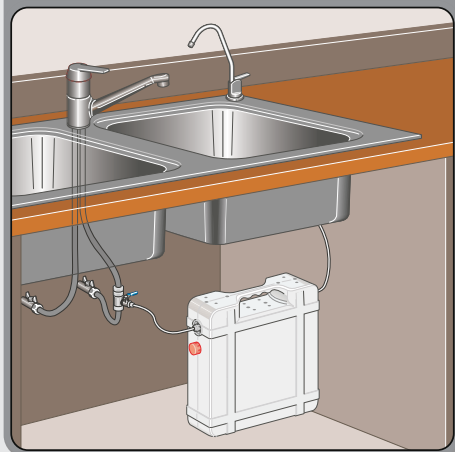

AQUASTOP - The easytest way to change

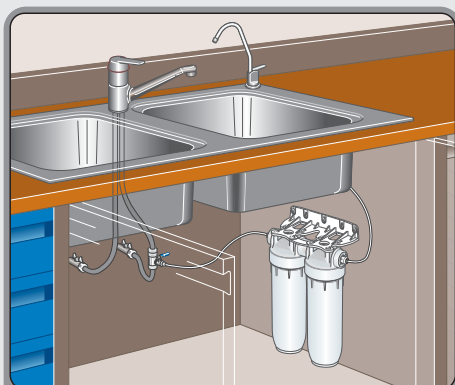

A range of filter housings made up with patented and registered DP MONO, DP DUO and DP TRIO housings, BRAVO DP are especially designed for the installation under the kitchen sink, complete with installation in 2 main versions:

- **BRAVO DP models** with standard quick-fit connections and dedicated tap, available as BRAVO DP MONO single housings, BRAVO DP DUO double housings and BRAVO DP TRIO triple housings.
- **BRAVO DP AQUASTOP models** with special quick-fit connections provided with Aquastop device and dedicated tap, available as BRAVO DP AQUASTOP MONO single housings, BRAVO DP AQUASTOP DUO double housings and BRAVO DP AQUASTOP TRIO triple housings.

Exclusive **BRAVO DP CASE with DP TRIO housings** in plastic case is a portable version of under-sink filters, complete with connection kit and dedicated tap.

All BRAVO DP housings fit to 10" cartridges with both standard SX flat seals (DOE) and BX quick-fit double o-ring end-cap, available from the wide range of Atlas Filtri cartridges SX and BX type. All housings are provided with Filter-Fit, special centering device for SX cartridges.

BRAVO DP housings are manufactured with the finest and most advanced materials under constant focus on innovative processing technologies and ceaseless modernization to ensure the absolute quality of our products.

Accessory spanner and wall brackets are provided with the package. A standing base for housings is available on demand. Sanding bases for housings and UV lamps for water sterilization are available as accessory on demand.



SX cartridges with standard flat seals.



BX cartridges with 45 mm double o-ring collar. Quick-fit connection for a perfect tightening.


ACCESSORIES INCLUDED



-S- wall bracket



-DUO- wall bracket

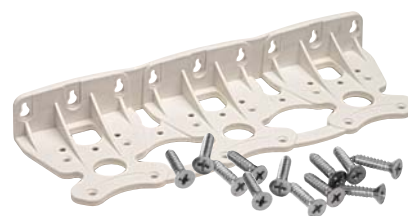

-TRIO- wall bracket

ACCESSORY ON DEMAND



DEPURAL® DP Base CODE LB7402015

HOUSINGS CERTIFICATIONS



The products are tested and certified under the most stringent procedures worldwide, in compliance with DM 25 (Italy), GOST (Russia) and with the sanitary certification ACS (France).

SYMBOLS LEGEND



For domestic use



Filter housings made in PET, a highly recyclable plastic, are manufactured with a proprietary procedure saving up to 60% of energy in injection molding compared with standard plastics. That is one of Atlas Filtri commitments to comply with Kyoto Treaty for the reduction of green house gas (CO₂) emissions in the atmosphere.



BRAVO DP

WORKING CONDITIONS

Max working pressure _____ 8 bar (116 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

HOUSINGS SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-rings: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.



-X- spanner

Filterfit - cartridge centering device



kit for Bravo DP



kit for Bravo DP AQUASTOP

ACCESSORY ON DEMAND



KIT UV 300 Bravo DP CODE EA3510011

KIT UV 600 Bravo DP CODE EA3510012

for UV LAMP specifications see page 283




BRAVO DP MONO

WITH STANDARD QUICK-FIT CONNECTIONS

CODE: RA6080010

SUITABLE CARTRIDGES: 10"




BRAVO DP DUO

WITH STANDARD QUICK-FIT CONNECTIONS

CODE: RA6080003

SUITABLE CARTRIDGES: 10"

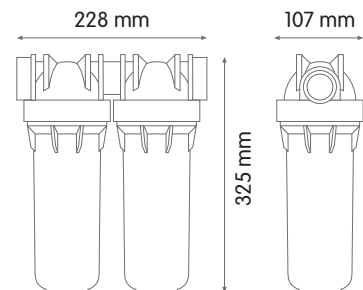


BRAVO DP TRIO

WITH STANDARD QUICK-FIT CONNECTIONS

CODE: RA6080320

SUITABLE CARTRIDGES: 10"

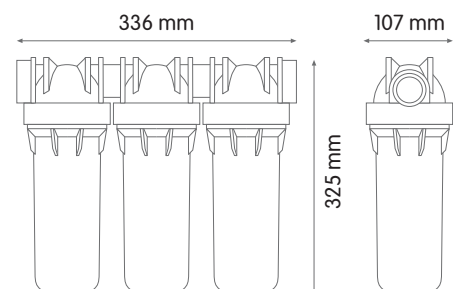



BRAVO DP AQUASTOP

WORKING CONDITIONS

Max working pressure _____ 8 bar (116 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

HOUSINGS SPECIFICATIONS


Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-rings: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.



BRAVO DP MONO AQUASTOP

WITH AQUASTOP QUICK-FIT CONNECTIONS


CODE: RA6080700
 SUITABLE CARTRIDGES: 10"



BRAVO DP DUO AQUASTOP

WITH AQUASTOP QUICK-FIT CONNECTIONS


CODE: RA6080730
 SUITABLE CARTRIDGES: 10"

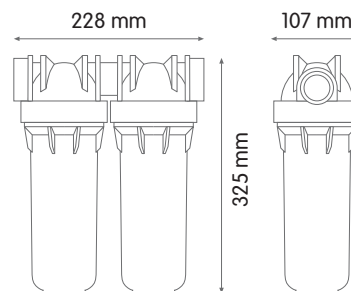

BRAVO DP TRIO AQUASTOP

WITH AQUASTOP QUICK-FIT CONNECTIONS

CODE: RA6080760
 SUITABLE CARTRIDGES: 10"

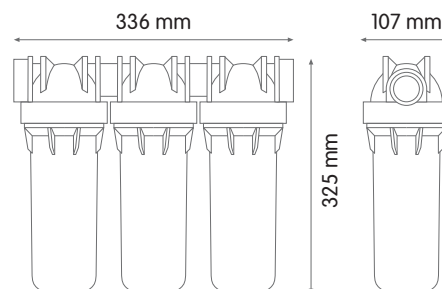



BRAVO DP CASE

WORKING CONDITIONS

Max working pressure _____ 8 bar (116 psi)
Max working temperature _____ 45°C (113°F)
Min working temperature _____ 4°C (39,2°F)

HOUSINGS SPECIFICATIONS


Non-toxic materials, suitable for drinking water.
Head: reinforced polypropylene.
Bowl: PET.
O-rings: EPDM.
Breather-valve: body stainless steel, o-ring EPDM.



BRAVO DP TRIO CASE

WITH STANDARD QUICK-FIT CONNECTIONS

CODE: RA6081300
SUITABLE CARTRIDGE: 10"

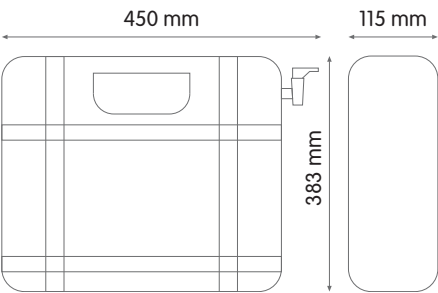

BRAVO DP TRIO CASE AQUASTOP

WITH AQUASTOP QUICK-FIT CONNECTIONS

CODE: RA6081500
SUITABLE CARTRIDGES: 10"

